



*/ Marley MH Fluid Cooler /*

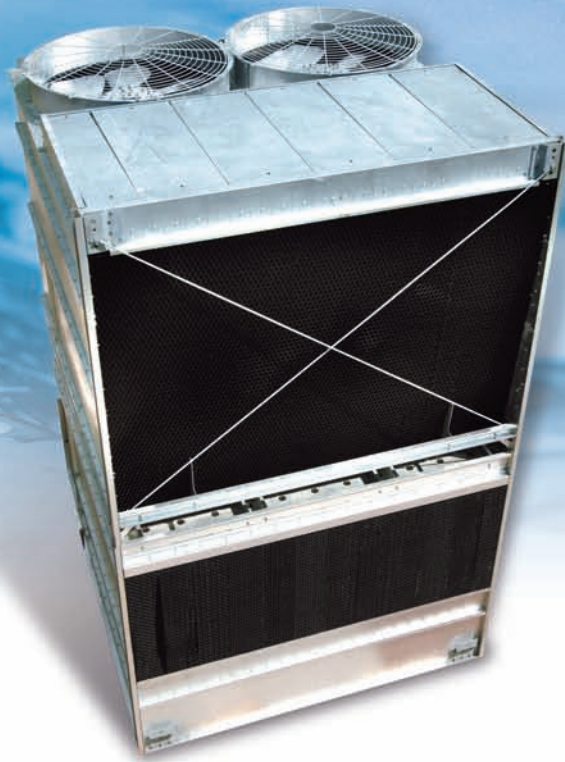

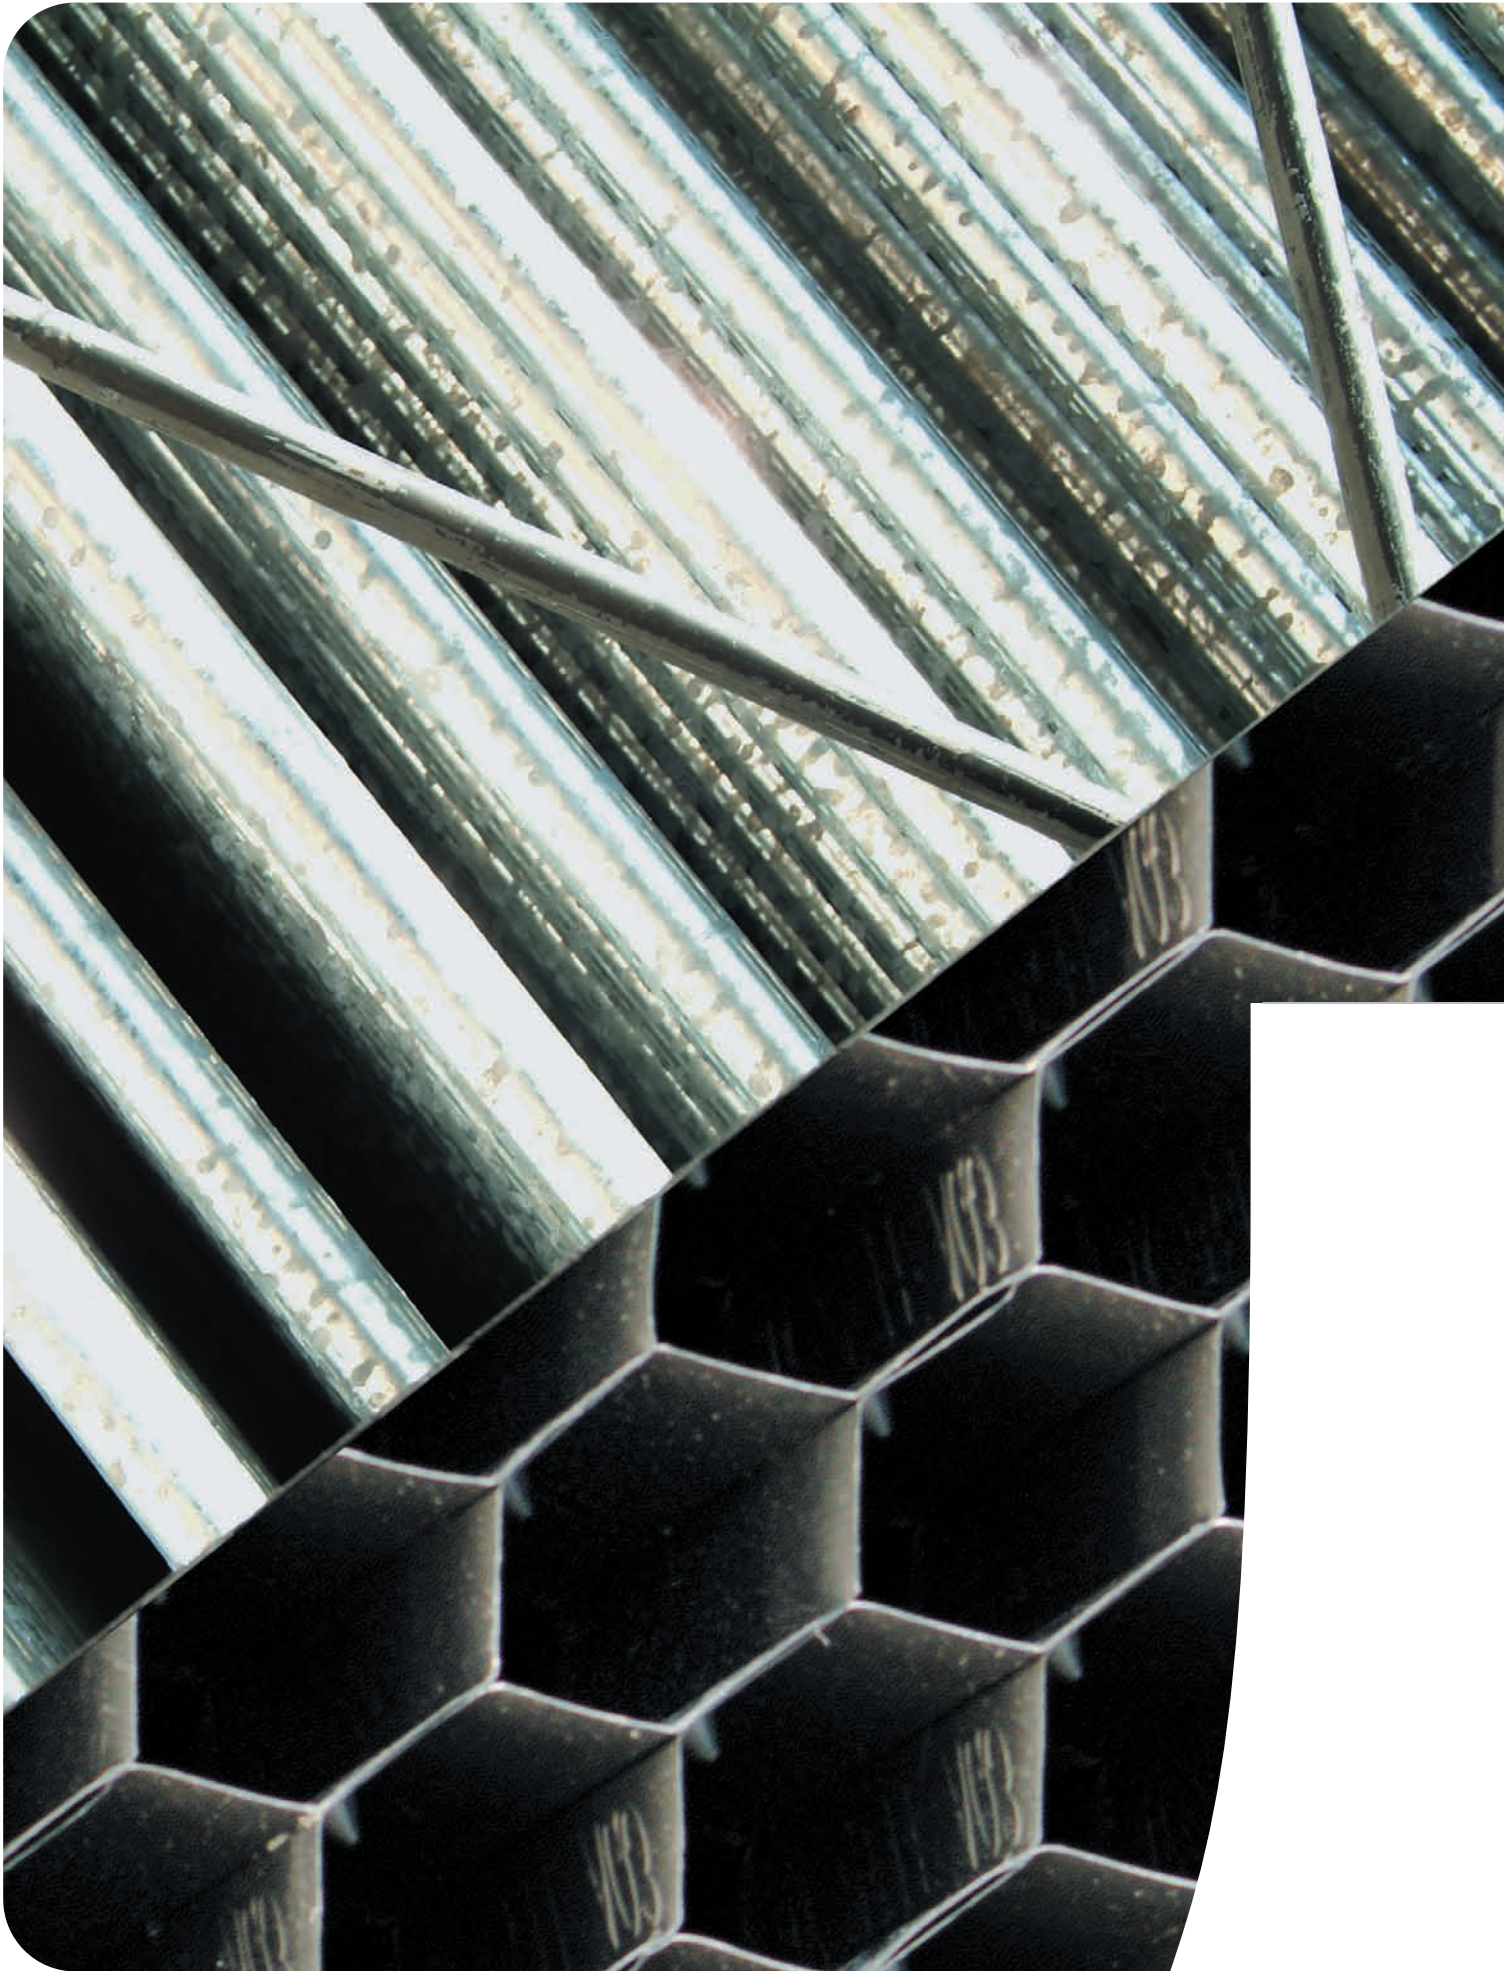

*Introducing the MH Fluid Cooler with CoolBoost Technology.*

## ***/ Hybrid design. Higher performance. /***

Leave it to Marley to build a fluid cooler that incorporates fill media and more circuits of coil to increase performance – as much as 10% – over other systems, and still maintain a space-saving footprint.

### ***The MH Fluid Cooler vs. Other Leading Coolers***

MODEL	L/s @ MAX kW	FOOTPRINT
<b><i>Other</i></b>	<b><i>28.4-40.7 @ 22.38</i></b>	<b><i>3.66m x 3.66m</i></b>
<b><i>MH Fluid Cooler</i></b>	<b><i>29.7-43.9 @ 22.38</i></b>	<b><i>3.66m x 3.66m</i></b>
<b><i>Other</i></b>	<b><i>41.3-56.2 @ 22.38</i></b>	<b><i>3.66m x 5.49m</i></b>
<b><i>MH Fluid Cooler</i></b>	<b><i>42.3-59.5 @ 22.38</i></b>	<b><i>3.66m x 5.49m</i></b>

Example: 35°C Hot Water, 29.5°C Cold Water, 25.5°C Wet-Bulb

When compared to coolers having the same footprint, the MH Fluid Cooler cools up to 3.3 L/s more.


# */ CoolBoost™ Technology /*

## */ How it works /*

The Marley MH Fluid Cooler uses mechanical, induced-draft, crossflow technology and fill media located above the coil.

- ① Process fluid is pumped internally through the coil.
- ② Recirculating water is cooled as it passes over the fill media, thermally equalized and redistributed over the outside of the coil.
- ③ A small portion of recirculating water is evaporated by air drawn through the coil and fill media, cooling the process fluid.
- ④ The coil section rejects heat through evaporative cooling using the fresh air stream and pre-cooled recirculating spray water.
- ⑤ Recirculated water falls from the coil into collection basins and is then pumped back up to be distributed over the fill media.



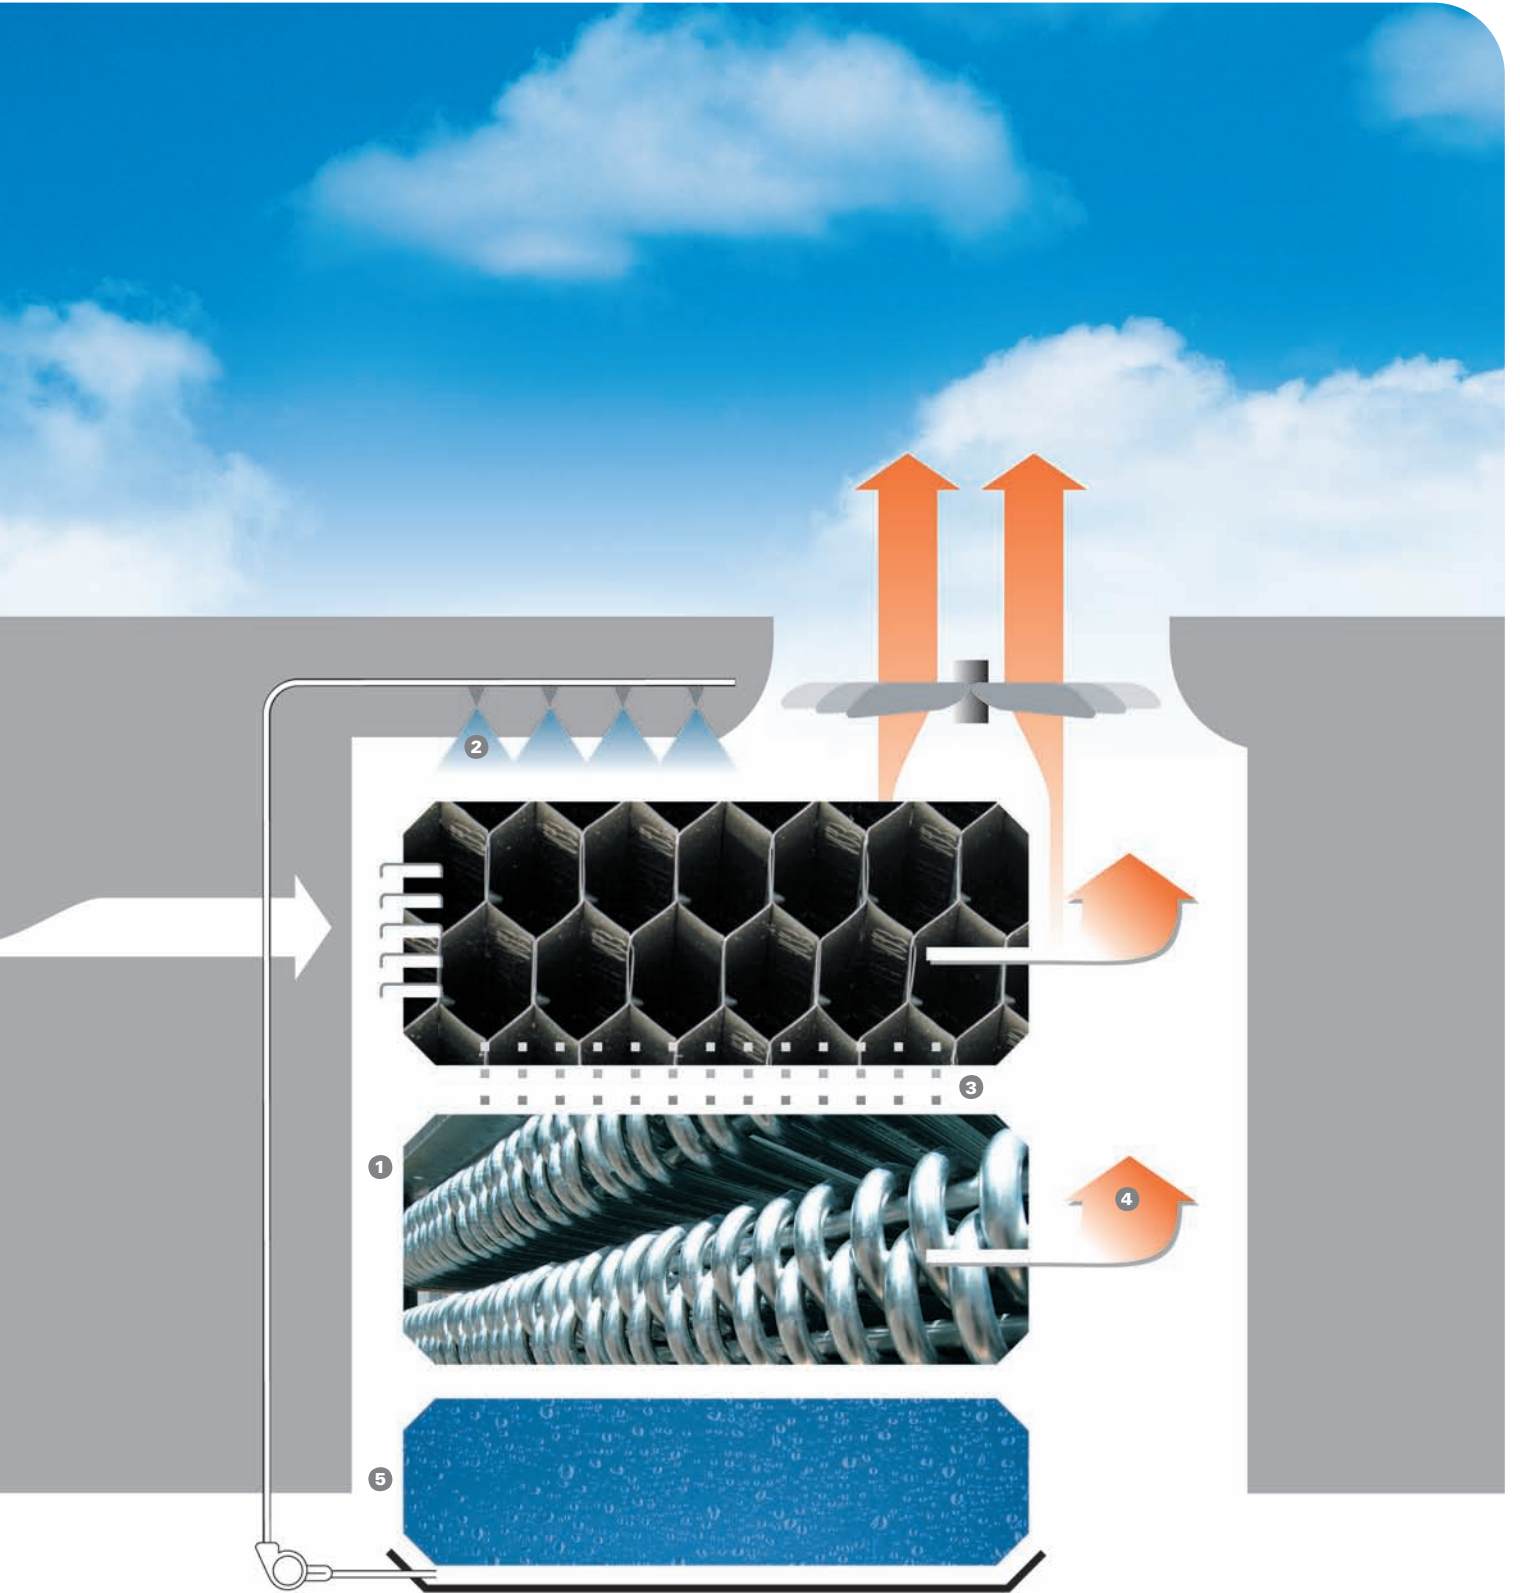



## */ Maximum efficiency. Maximum Marley. /*

The Marley MH Fluid Cooler is the most efficient system on the market – and your best choice for industrial and HVAC applications. By keeping the process fluid in a clean, closed loop, and combining the function of a cooling tower and heat exchanger into one system, they provide superior operational and maintenance benefits:



- Protect process fluids from contamination
- Maximize system efficiency by reducing fouling and scaling tendencies
- Reduce system energy and maintenance costs
- Conserve valuable space in equipment rooms
- Provide reliable, efficient, year-round operation
- Deliver up to 10% increased performance over other coolers

CTI Certified. With capacities ranging from 100 tons to 650 tons. The Marley MH Fluid Cooler is suitable for cooling a wide range of fluids – from water and glycols, to quench oils and plating solutions.



---

## */ Nobody out-cools Marley /*

When it comes to tons per horsepower, nobody beats Marley. Call **60 3 7947 7800** or visit **[spxcooling.com](http://spxcooling.com)** to learn more.



**SPX**®

**COOLING TECHNOLOGIES**

UNIT 505, BLOCK B  
PHILEO DAMANSARA 2  
NO. 15 JALAN 16/11  
OFF JALAN DAMANSARA  
46350 PETALING JAYA, MALAYSIA  
60 3 7947 7800  
spxcooling.asiapacinfo@spx.com  
[spxcooling.com](http://spxcooling.com)

In the interest of technological progress,  
all products are subject to design and/or  
material change without notice.  
©2009 SPX Cooling Technologies  
sea\_MHF-09